



Tech Basic Dri-FIT Ladies' Polo



203697

Product Features:

- 8.8-oz, 100% Dri-FIT polyester with moisture management technology

Ladies' Sizes: S-2XL

Icons/Fabric Features:



Available Colours and PMS Colours

Textile fabric colours are subject to dye lot variation and will not be exact match to print pantone reference

WHITE



No PMS

BLACK



Black C

MIDNIGHT NAVY



2767C

VARSITY ROYAL



7685C

PRO RED



201C

Due to the nature of polyester, special care must be taken throughout the decoration process.

NIKE® products may not be sold without embellishment.

203697 - NIKE® Tech Basic Dri-FIT Ladies' Polo


GARMENT MEASUREMENTS

Size	S	M	L	XL	2XL
Chest - Half Measure	19"	20"	21 1/4"	22 1/2"	23 3/4"
Chest - Full Measure	38"	40"	42 1/2"	45"	47 1/2"
Body Length from HPS	23"	24"	25"	26"	27"
Sleeve Length from CB	14 1/8"	14 3/4"	15 3/8"	16"	16 5/8"

Finished measurements in inches. Refer to "How to Measure" guide for detailed information on measurement instructions.

LADIES' General Sizing Guide

Size	S	M	L	XL	2XL
Numeric Size	4-6	8-10	12-14	16	18-20
Bust	35"-36"	37"-38"	39"-41"	42"-44"	45"-47"
Waist	26"-27"	28"-30"	30"-32"	33"-35"	36"-38"
Hip	35"-37"	37"-39"	39"-41"	42"-44"	45"-47"
Sleeve Length-CB	30 1/2"-31"	31 1/2"-32"	32 1/2"-33"	33 1/2"-34"	34"-34 1/2"

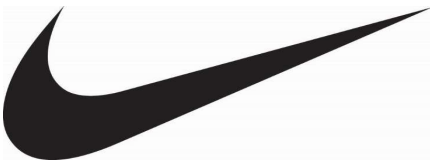

DECORATING INSTRUCTIONS FOR POLYESTER FABRICS

Due to the nature of polyester, special care must be taken throughout the decoration process. Here are some tips to effectively decorate our performance products.

- Garment temperature must not exceed 320°F or 160°C. Exceeding this temperature will cause the fabric to shr become wavy or cause dye migration.
- Dryer temperature and belt speeds must be changed accordingly for polyester fabric.
- If flashing these garments, do not exceed 1-2 seconds. Anything longer may damage the fabric as stated above

Screen Printing: These garments require the use of poly inks that cures at a lower temperature. A Dyno Grey b blocker on all colours and a second white base blocker on all dark colours are recommended. Please consult you supplier for more information.

- Polyester requires a longer cooling time than cotton. Avoid overlap of garments and screen-print/heat transfer u the garments are cooled. Failure to cool the fabric prior to stacking into a printer's fold may cause the fabric and applied ink to stick together.

Heat Transfers: Poly mark heat transfers need to be created with an anti-migration layer in the design. This pro can only be done on white or very light colour shirts. Inks used in printing paper design needs to be darker than t base fabric or colour will migrate with the fabric colour resulting in a bleeding effect.

Sublimation Printing: As noted for the poly mark heat transfers, this process can only be done on white or ver light colour shirts. Inks used in printing paper design needs to be darker than the base fabric or colour will migrat with the fabric colour resulting in a bleeding effect.

- If you heat press these garments, you must adjust the time, temperature and pressure. Failure to do so may dan the fabric as stated above.
- A test sample run is recommended, especially if you have a large order or if your printer does not specialize in p on performance fabrics.